

## 1] PRODUCT PRESENTATION

The stainless steel all-active exit button range comes in standard UK single gang size and is available in both, surface or flush mount. The switch has a contact rating of 2A @24Vdc. The faceplates are manufactured in 304 stainless steel with a brushed finish. The text on the button is laser engraved with a 1mm paint fill (RAL6005). Surface units are provided with an aluminium shroud finished in brushed stainless steel and supplied with 2 x stainless steel screws (M3.5x25).

Feature	Description
Material	304 stainless steel (faceplate)
Contact Rating	2A @ 24Vdc
Mechanical Life	1,000,000 cycles
Operating Humidity	0-95% relative humidity
Output Contact	Single Pole Double Throw NO/NC/COM
Operating Temperature	-20°C to 55°C

 CE Certification

 UKCA Certification

 WEEE & RoHS


RTE-85E




RTE-85EF



RTE-85DL




RTE-85DLF

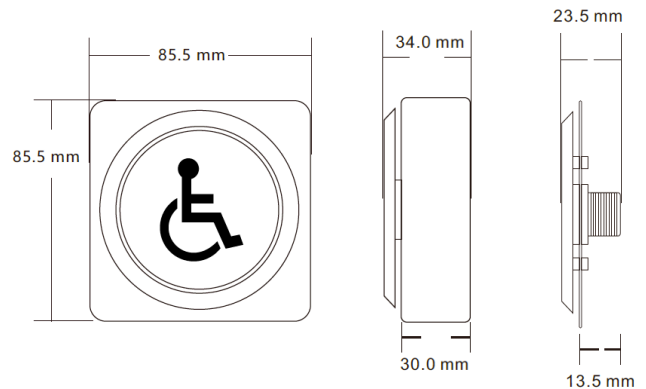

## 2] WIRING

- 2 sets of single pole: 1 x NO and 1 x NC
- Max load: 2A @ 24Vdc.

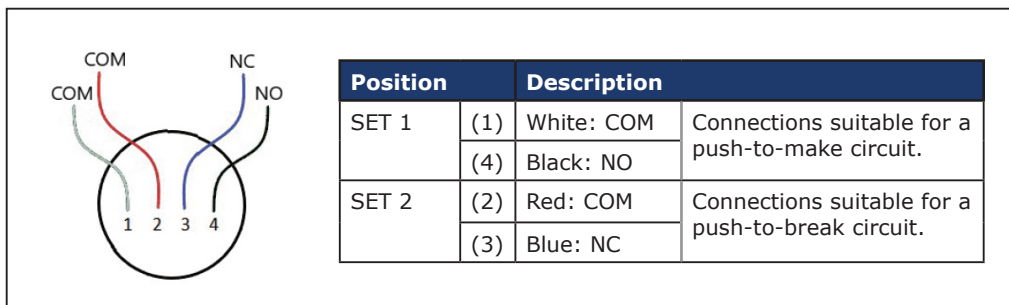

For queries visit our website <https://www.cdvi.co.uk> or contact us at:  
**sales@cdvi.co.uk**  
**+44 1628 531300**